


# 3U VPX NVMe Carrier with Removable Drive Module

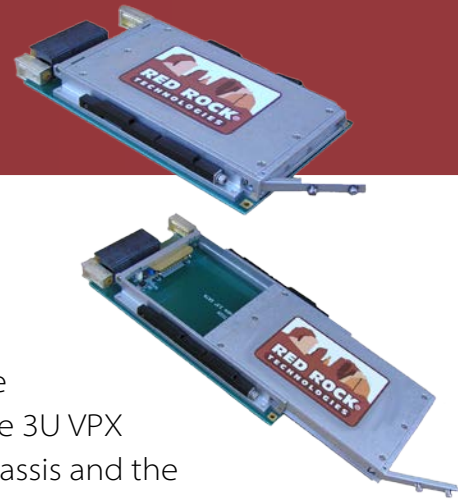

## RRT-3UVPX-NVMe-R

For applications that require the frequent removal of SSD, the 3U VPX NVMe Removable drive module is recommended. It consists of 2 components; the 3U VPX carrier board with PCI express (PCIe) interface that mounts in the 3U VPX chassis and the removable NVMe drive module. The connectors between the drive module and the carrier are rated for 100,000 mating cycles to support frequent insertions/removals.

The drive module can use any COTS U.2 NVMe Solid State Drive (SSD) providing capacities up to 8TB and transfer rates of up to 2000 MB/S. Option for discrete controlled secure erase.

### FEATURES INCLUDE

- PCIe Gen 2 x 4 interface to VPX backplane
- OpenVPX Fat Pipe (FP) storage module profile MOD-3-PER-1F-16.3.2.1 or 2
- VITA 46, 47, 48, 65
- Provides boot disk and/or disk storage
- Conduction or air cooled versions
- Rugged removable module connectors rated for 100,000 mating cycles
- Uses COTS U.2 NVMe SSDs for wide range of options
- Options for discrete controlled secure erase
- Robust design for extreme temperature, shock & vibration environments
- High performance PCIe x4 transfer rates up to 2000 MB/S
- VxWorks™, Linux and Windows™ drivers available

# Security Options

ERASE/DESTROY OPTIONS INVOKED BY COMMAND OR BY DISCRETE INPUT

**Fast Erase** Sets all locations to set value

**NSA/CSS Manual 9-12 Erase** Erases all locations, including bad blocks, then sets all locations to 0x55, then internal verification is performed reading 1% of capacity confirming data pattern

**RCC-TG IRIG 106-07 Chapter 10 Erase** Erases all locations, including bad blocks, then sets all locations to 0x55, then sets all locations to 0xAA, and finally erased

**Drive Destroy** Performs erase of all NAND flash including internal SSD firmware, file system, and tables which makes the drive unusable and unreadable

## Ordering Information – 3U VPX Carrier Board

**RRT-3UVPX-NVMe-R**

C – UR – X

### Requirements

#### Cooling

C - Conduction Cooled  
A1 - Air Cooled, 0.8" pitch  
A2 - Air Cooled, 0.85" pitch  
A3 - Air Cooled, 1.0" pitch

### Options May be Left Blank

#### Extended Temperature Range

X - -40°C to 85°C

#### Conformal Coating

UR - polyurethane  
AR - acrylic

Example: RRT-3UVPX-NVMe-R-C-UR-X

Example: RRT-3UVPX-NVMe-R-A3

## Ordering Information – Removable Drive Module

**RRT-DM-NVMe**

MLC – 480GB – SE1 – UR – X

### Requirements

#### PCIe Drive Type

MLC - Multi Level Cell SSD

#### Capacity

Any capacity up to 8TB

### Options May be left blank

#### Extended Temperature Range

X - -40°C to 85°C

#### Conformal Coating

UR - polyurethane  
AR - acrylic

#### Security Options

FE - Fast Erase  
SE1 - NSA/CSS Manual 9-12 Erase  
SE2 - RCC-TG IRIG 106-07 Chapter 10 Erase  
DD - Drive Destroy

Example: RRT-DM-NVMe-MLC-480GB-SE1-UR-X

Example: RRT-DM-NVMe-MLC-8TB-UR

Example: RRT-DM-NVMe-MLC-1TB

206 West Julie Drive - Suite 2, Tempe, AZ 85283 | United States of America

Tel: 480-483-3777 | Toll Free: 1-800-808-7837

www.redrocktech.com | info@redrocktech.com

© Copyright 2018 Red Rock Technologies, Inc.



# 3U VPX Removable NVMe Drive Module Specifications

Performance	
Version	SSD-MLC
Capacities (1)	Up to 2TB
NAND FLASH Type	MLC
Interface (2)	PCIe Gen 2 x 4
Throughput	2000 MB/S
Sector Size	512
Reliability	
MTBF-Drive (in hours)	1.5 million
MTBF-Drive Module (6)	3 million hours
MTBF-Drive Carrier (6)	3 million hours
Data Retention	12 months power-off retention once SSD reaches rated endurance at 30°C
Endurance Rating(7)	500 TBW (2TB) for 5 years
Carrier/Drive Module Mating cycles	100,000
Power	
Voltage	5 V+/- 5%, +3.3V +/- 5%
Watts	1.2
Watts-active	2.5
Environmental	
Temperature – operating (3) VITA 47 Class	-40 to 85C, CC4, AC3 for –X option 0 to 70C, CC1, AC1 for Standard SSD
Temperature storage	-40 to 85C
Relative Humidity	5% to 95%
Altitude	80,000 ft (24,000 meters)
Shock (4) VITA 47 Class	40g 11 millisecond half-sine, OS2
Vibration (5), VITA 47 Class	0.1 g <sup>2</sup> /Hz100 Hz to 1000 Hz,V3
Physical	
Form Factor	3U VPX
Weight	14 oz max.
Pitch	0.8", 0.85" and 1.0" options
<p>(1) Larger capacities available as new COTS U.2 NVMe drives released</p> <p>(2) Interface connected via compatible slot profile MOD-3-PER-1T-16.3.3.1 or 2</p> <p>(3) Thermal qualification per MIL-STD-810F, Method 501 Procedure II, and MIL-STD-810F, Method 502, Procedure II</p> <p>(4) Shock qualification per MIL-STD-810F, Method 516, Procedure I</p> <p>(5) Vibration qualification per MIL-STD-810F, Method 514, Procedure I</p> <p>(6) Telcordia SR-322, issue 3, operating temp (40C), electrical stress (50%), environmental factor (1.0)</p> <p>(7) Based on JESD218 standard with 4KB random write workload</p>	

Red Rock Technologies, Inc. reserves the right to modify, change or discontinue specific products within its product line at its own discretion. Red Rock Technologies, Inc. does not assume any liability resulting from the application or use of its products. The information contained herein has been checked and is believed to be entirely accurate, however, no responsibility is assumed for inaccuracies.

"Red Rock Technologies" and the mountain logo are registered trademarks of Red Rock Technologies, Inc.

© Copyright 2018 Red Rock Technologies, Inc. All rights reserved. (Rev. 06/01/2018)

206 West Julie Drive - Suite 2, Tempe, AZ 85283 | United States of America

Tel: 480-483-3777 | Toll Free: 1-800-808-7837

www.redrocktech.com | info@redrocktech.com

© Copyright 2018 Red Rock Technologies, Inc.

