


# XMC Fixed/Removable CFast™ Module

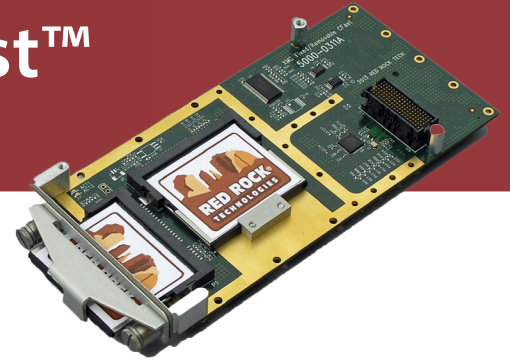

## RRT-XMC-CFast

The XMC Fixed/Removable CFast™ module is a mezzanine storage module with a dual-channel PCI Express to SATA 3 controller that supports:

- One Fixed CFast™
- One Removable CFast™
- One Fixed and one removable CFast™

Provides boot drive and/or disk storage for VPX, VME, cPCI and ATCA single board computers (SBCs) with XMC Slot.

CFast™ is same form factor as Compact Flash but with SATA interface thus providing faster throughput. The CFast™ connectors are rated for 10,000 mating cycles to support frequent insertions/removals.

## FEATURES INCLUDE

- XMC PCIe Gen2 x1 interface per VITA 42.3
- Transfer rates up to 500 MB/s
- CFast™ capacities up to 256GB
- Air or conduction cooled
- Uses COTS CFast™ drives for wide range of options
- Removable CFast™ drive secured by rugged retainer clip (air cooled)
- Robust design for extreme temperature, shock & vibration environments
- High performance SATA3 transfer rates. Backwards compatible with SATA1/2
- Compatible with all SBCs with XMC slot
- Meets XMC VITA 42 height requirements
- For -X version all parts rated for -40C to 85C. No parts derating
- VxWorks™, Linux and Windows™ drivers available
- Front panel activity LEDs (air cooled)
- ROHS compliant

# Ordering Information – XMC Fixed/Removable CFast™ Module

**RRT-XMC-CFast** - F - C - UR - X - SH12MM

## Requirements

### Port

R = Removable CFast™  
(air cooled versions only)  
F = Fixed CFast™

### Cooling

C = Conduction Cooled  
A = Air Cooled

## Options May be Left Blank

### Conformal Coating

UR = polyurethane  
AR = acrylic

### Extended Temperature Range

X = -40°C to 85°C

### Stack Height

SH12MM = Stack Height of 12mm (10 mm  
Stack Height standard)

Example: RRT-XMC-CFast-R-A

Example: RRT-XMC-CFast-F-C-UR-X-SH12MM

Example: RRT-XMC-CFast-R-F-A

# Ordering Information – CFast™ Drive

**RRT-CFast** - SLC - 120GB - 50 - X

## Requirements

### NAND FLASH Type

SLC = Single Level  
MLC = Multi Level

### Capacity in GB

Any capacity up to 256GB

## Options May be left blank

### Write Performance

30 = 30MB/s, 50 = 50MB/s, 100 = 100MB/s, 150  
= 150MB/s, 200 = 200MB/s; 300 = 300 MB/s

### Extended Temperature Range

X = -40°C to 85°C

Example: RRT-XMC-CFast-MLC-120GB-50-X

Example: RRT-XMC-CFast-SLC-15GB

# XMC Fixed/Removable CFast™ Module Specifications

Performance	
Capacities	4GB-256GB per COTS availability
XMC Interface	VITA 42.3/PCIe 2.0x1 Compliant
XMC Interface Speed Read/Write (PCIe Gen1/Gen2)	2.5/5Gbits/s
CFast™ Interface	SATA 3 backwards compatible with SATA 1/2
Sector Size	512
Reliability	
MTBF – Drive Carrier (1)	3 million hours
Power	
Voltage	VPWR +5V +/- 5% or +12V +/- 5% +3.3+/- 0.3V
Watts-idle	1.2
Watts-active	2.5
Environmental	
Temperature Operating, VITA 47 Class	0° to 70°C , AC1, CC1
Temperature Operating (2) , VITA 47 Class	-40° to 85°C , CC4, AC3
Temperature Storage	-55° to 95°C
Relative Humidity	5% to 95%
Altitude	80,000 ft (26,000 meters)
Shock (3), VITA 47 Class 0S2	40g, 11 millisecond terminal sawtooth pulse
Vibration (4)	0.1g <sup>2</sup> /Hz
Physical	
Weight	3.5 oz; 100 g max
<ol style="list-style-type: none"> <li>1) Telcordia SR-322, Issue 3, operating temp (40C), electrical stress (50%), environmental factor (1.0).</li> <li>2) Thermal qualification per MIL-STD-810, Method 501 Procedure II, and MIL-STD-810, Method 502, Procedure II.</li> <li>3) Shock qualification per MIL-STD-810F, Method 516, Procedure I.</li> <li>4) Vibration qualification per MIL-STD-810F, Method 514, Procedure I.</li> </ol>	

Red Rock Technologies, Inc. reserves the right to modify, change or discontinue specific products within its product line at its own discretion. Red Rock Technologies, Inc. does not assume any liability resulting from the application or use of its products. The information contained herein has been checked and is believed to be entirely accurate, however, no responsibility is assumed for inaccuracies.

“Red Rock Technologies” and the mountain logo are registered trademarks of Red Rock Technologies, Inc.  
© Copyright 2017 Red Rock Technologies, Inc. All rights reserved. (Rev. 06/22/2017)